
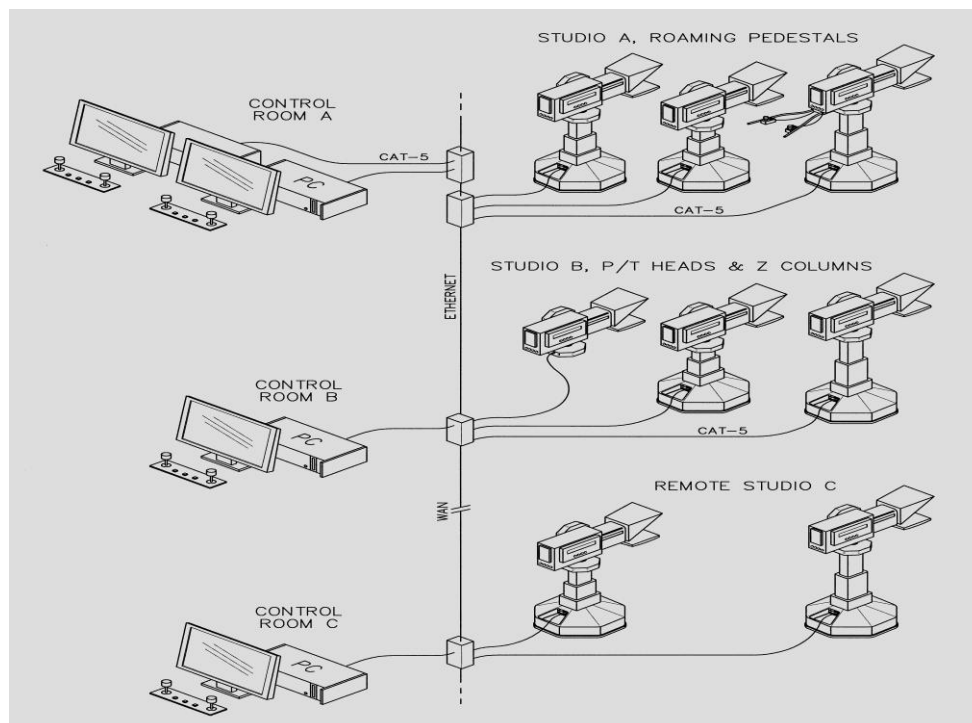


CAMBOTICS 500/600/700 User Interface

The Cambotics User Interface is a networked Windows PC based system used to control Cambotics robotics devices. The Cambotics Ethernet architecture is engineered for reliability, redundancy, flexibility and future expansion. Fewer “boxes” are required increasing reliability and simplifying installation. The redundancy feature allows for a fully redundant system configuration just by adding a second control point.

The friendly windows user interface makes setting up a shot as easy as selecting a camera, framing a shot using joysticks and a focus knob then storing it by touching the screen. It appears as a thumbnail image and recalling it is just a touch away.

Cambotics systems can be interfaced to all the popular news automation systems.

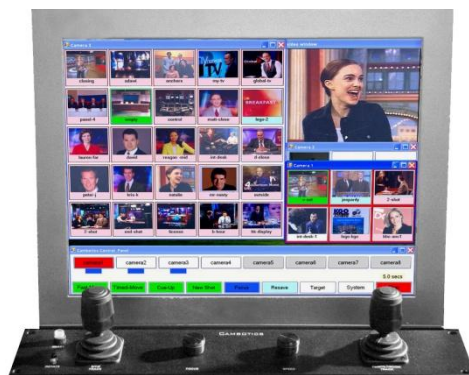

CAMBOTICS INC.

520 N. Quince Street Bldg. 5
Escondido, Ca 92025
Tel: 760-233-9517 Fax: 760-233-9756
www.cambotics.com